

XY2AU2

enabling switch - 2 NO + 1 NC - 1 NO additional contact - double insulated



Main

Range of product	Preventa XY2
Product or component type	Enabling switch
Component name	XY2AU
Enclosure type	Double insulated

Complementary

Contacts type and composition	2 NO + 1 NC
Installed device	1 NO additional contact
Operator position information	3 positions
Enclosure material	PA66
Connections - terminals	Terminal block : 1 x 0.34...1 x 1.5 mm ²
Mechanical durability	1000000 cycles
Cable entry	1 entry, 7...13 mm
Contact code designation	C300 with AC-15 utilisation category at 125 V, 0.75 A AC current conforming to IEC 60947-5-1 appendix A C300 with AC-15 utilisation category at 250 V, 1.5 A AC current conforming to IEC 60947-5-1 appendix A R300 with DC-13 utilisation category at 125 V, 0.22 A DC current conforming to IEC 60947-5-1 appendix A R300 with DC-13 utilisation category at 250 V, 0.1 A DC current conforming to IEC 60947-5-1 appendix A
[Ithe] conventional enclosed thermal current	5 A
[Ui] rated insulation voltage	125 V on supplementary contact 250 V inside (degree of pollution: 2) conforming to IEC 60947-1 250 V outside (degree of pollution: 3) conforming to IEC 60947-1
[Uimp] rated impulse withstand voltage	2.5 kV conforming to EN 60947-1
Positive opening	With conforming to IEC 60947-5-1 appendix K
Contact operation	Slow-break
Resistance across terminals	
Operating force	12 N 50 N
Short-circuit protection	4 A fuse protection by cartridge fuse type gG
Product weight	0.32 kg

Environment

standards	CULus 508 EN/IEC 60947-1 EN/IEC 60947-5-1 CSA C22.2 No 14
protective treatment	TC
ambient air temperature for operation	-10...60 °C
ambient air temperature for storage	-40...70 °C
vibration resistance	6 gn (f = 5...55 Hz) conforming to IEC 60068-2-6
shock resistance	10 gn for 11 ms conforming to IEC 60068-2-27
electrical shock protection class	Class II conforming to EN/IEC 61140
IP degree of protection	IP65 conforming to IEC 60529


The information provided in this documentation contains general descriptions and/or technical characteristics of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Contractual warranty

Warranty period


18 months

Dimensions

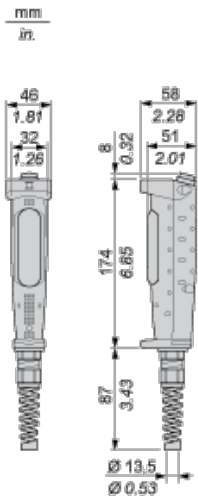



Wiring Diagram Example

With XPSVC Safety Module

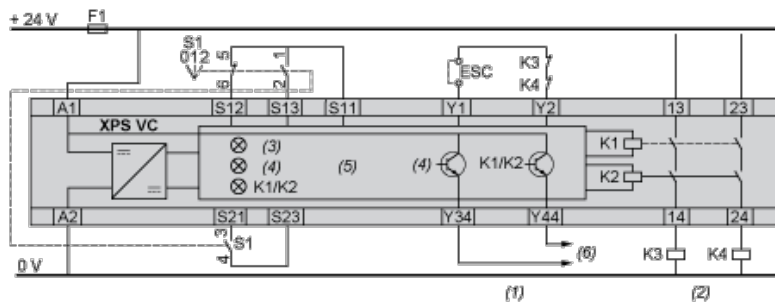

ESC external start conditions

- (1) 2 solid state outputs
- (2) 2 safety outputs
- (3) supply A1/A2
- (4) fault
- (5) logic
- (6) to PLC



■ contact closed

□ contact open

⊕ N/C contact with positive opening operation